




APPLICATIONS

- Industrial cleaning

SECTORS OF ACTIVITY

- Dairy industry
- Communities
- Shopkeepers, Craftsmen
- Abattoirs
- Industrial uses

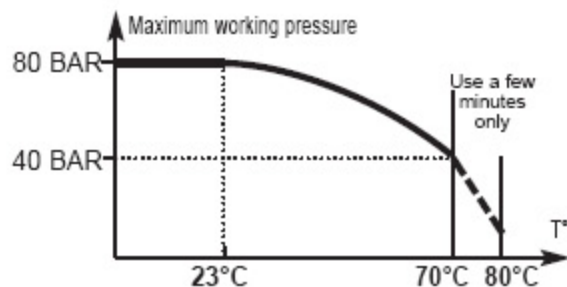

SUPER THERMOCLEAN® 40

+70
°C
-10



Average pressure industrial washing hose
(40 bar at 70°C).

Six-layer design with double polyester fibre reinforcing.



- 1 Blue cover in flexible, non-staining, greaseproof, detergent and disinfectant resistant food grade PVC.
- 2 4 Double polyester reinforcing.
- 3 5 Intermediary layers in flexible PVC.
- 6 Inner surface in flexible grey PVC.

Marking : SUPER THERMOCLEAN 40 BAR / 70°C (EU) N° 10/2011 [year of fabrication] [batch number]

ADVANTAGES

Super material properties of Thermoclean 40 make it a high-performance, safe and reliable hose capable of meeting severe conditions :

- exceptional temperature performance (up to 70°C under 40 bar continuously, peaks possible up to 80°C) ;
- six highly flexible layers provide excellent handling ;

- non-staining blue outer surface is resistant to oily products and detergents ;
- excellent kinking resistance.

CONNECTORS

Barbed connectors with 'O' type clips (retighten the clips after first high temperature use).

Crimping is possible under certain conditions (please consult us).

CHEMICAL RESISTANCE

See table pages 69 to 72 column B.

											Blue		
mm	mm	mm	mm	mm	mm	20°C	70°C	20°C	70°C	mm	25 m	50m	100 m
12	+/- 0,6	22	+/- 0,8	5	335	240	120	80	40	84	100758	100761	100774