

AG 1000 HT

VEHICLE

Exhaust gas



Applications

Extraction of exhaust gases and other hot gases from motor vehicles.
For all types of spring recoil exhaust hose reels, exhaust fume extractors, and also exhaust rails for moving vehicles.

Advantages

- Extremely low weight and flexibility makes the hose especially suitable for manual handling.
- Smooth inside reduces friction loss.
- Manufactured with a polyester helix as standard.
- The polyester helix makes the hose regain original shape when ran over by motor vehicle.
- Hose lengths can be connected by screwing them together.
- Also available with steel helix in order to withstand higher vacuum.

Technical description

Inner tube: rubberized fabric, EPDM/polyester, heat resistant, black.

Helix: EPDM-coated polyester.

Cover: outside rubberised helix, black.

Temperature range: - 40 °C to + 180 °C.

Complementary information

Packed in cartons.

ID mm	Wall thickness mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Price €/m
32.0	1.0	0.60	40	0.28	10	Consult
38.0	1.0	0.55	50	0.32	10	Consult
45.0	1.0	0.50	55	0.34	10	Consult
51.0	1.0	0.40	65	0.42	10	34.32 €
63.0	1.0	0.30	80	0.53	10	37.29 €
76.0	1.0	0.25	95	0.60	10	38.17 €
102.0	1.0	0.20	110	0.85	10	42.35 €
127.0	1.0	0.15	130	1.04	10	50.67 €
152.0	1.0	0.10	140	1.24	10	58.22 €
204.0	1.0	0.03	190	1.68	10	86.15 €

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

Branding:




TRELLEBORG AG 1000 HT - ID

AG 1000 LT

VEHICLE

Exhaust gas

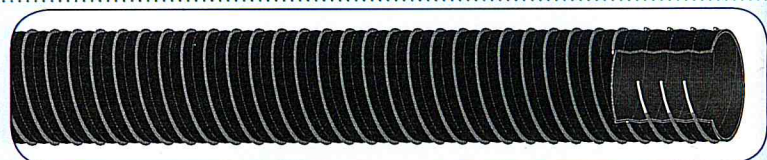

Applications

Extraction of exhaust gases and other hot gases from motor vehicles.
For all types of spring recoil exhaust hose reels, exhaust fume extractors, and also exhaust rails for moving vehicles.

Advantages

- Extremely low weight and flexibility makes the hose especially suitable for manual handling.
- Smooth inside reduces friction losses.
- Hose lengths can be connected by screwing them together.

Technical description

Inner tube: heat resistant, rubberized fabric, EPDM polyester, black.

Helix: EPDM-coated steel, black.

Temperature range: - 40 °C to + 150 °C.

Complementary information

Delivered in plastic wrapped coils.

ID mm	Wall thickness mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Price €/m
76.0	1.0	0.25	95	0.60	10	28.66 €
102.0	1.0	0.20	110	0.74	10	31.78 €
127.0	1.0	0.15	130	0.91	10	38.02 €
152.0	1.0	0.10	140	1.10	10	43.67 €

Length in blue = stock item. Length in black = non stock (consult us for minimum quantity of order).

No branding.