



AIR / WATER - 20 bar

STAINLESS STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X

FIXED




SWIVELLING



Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- "viton" seals

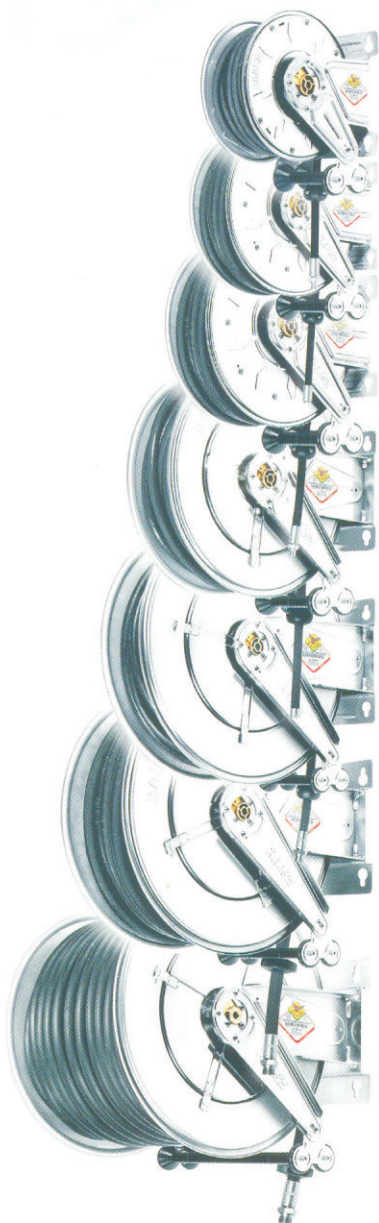

S. 290

Article

8292.100

8292.101

8292.104

S. 330

8332.100

8332.101

S. 390

8392.100

8392.102

S. 430

8432.100

8432.101

8432.102

8432.103

8432.104

S. 530

8532.100

8532.101

8532.102

S. 540

8542.100

8542.101

8542.102

8542.103

8542.105

8542.106

S. 560

8562.100

8562.101

8562.103

8562.104

8562.105

8562.106

Article

-

-

-

-

-

8382.100

8382.102

8422.100

8422.101

8422.102

8422.103

8422.104

for ABS hose reels Series 430 see page 153

8522.100

8522.101

8522.102

8552.100

8552.101

8552.102

8552.103

8552.105

8552.106

-

-

-

-

-

-

Hose supplied

without hose

10m - 3/8" (995.210)

15m - 1/4" (993.215)

without hose

12m - 3/8" (995.211)

without hose

18m - 3/8" (995.217)

without hose

12m - 3/8" (995.212)

18m - 3/8" (995.218)

10m - 1/2" (996.210)

15m - 1/2" (996.215)

without hose

20m - 1/2" (996.220)

25m - 1/2" (996.225)

without hose

15m - 3/4" (997.215)

20m - 3/4" (997.220)

15m - 1" (998.215)

without hose

30m - 1/2" (996.230)

without hose

30m - 3/4" (997.230)

40m - 3/4" (997.240)

20m - 1" (998.220)

30m - 1" (998.230)

without hose

Connection

inlet

outlet

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F1/2"G

F1/2"G

F1/2"G

F1/2"G

F1/2"G

F1/2"G

F1/2"G

F1/2"G

F1"G

F1"G

F1"G

F1"G

F1/2"G

F1/2"G

F1"G

F1"G


F1"G

F1"G


F1"G

F1/2"G

FIXED OVERALL DIMENSIONS

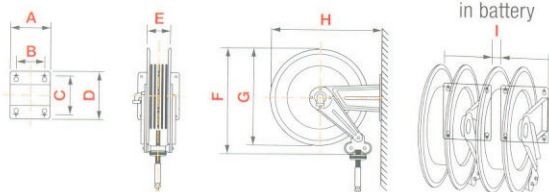

SWIVELLING OVERALL DIMENSIONS

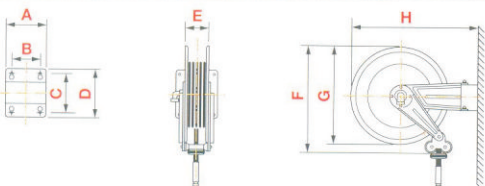

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg*
S. 290	186	140	196	226	110	310	300	320	-	0,037	from 7 to 12
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

Art.	A	B	C	D	E	F	G	H	1-m ³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.